

5 in HIGH-QUALITY LOUDSPEAKERS


Primary application

5-8 litres acoustic enclosures.

Details


Equipped with a very sensitive Ferroxdure magnet system.

Special textile cone rim allows large amplitudes of the cone movements at low frequencies. This results in an optimum bass reproduction in the smallest enclosures. Low resonance frequency and wide frequency range.

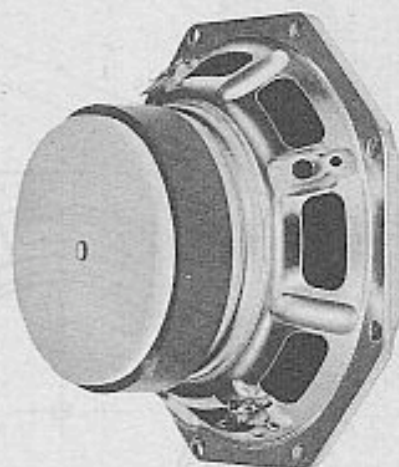

RZ 21906-13

Technical performance

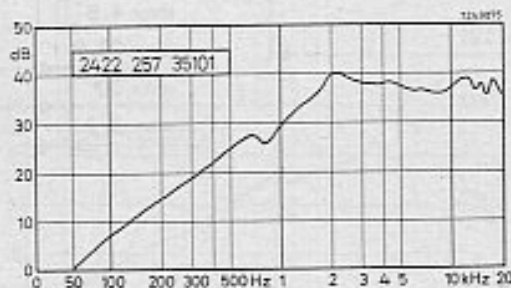

version	re- sponse curve	impe- dance at 1 kHz (Ω)	power handling capacity (W)	resonance frequency (Hz)	total magnetic flux (Mx)	flux density (Gs)	catalog number 1)
M4	M	4	6	85	29 400	9800	2422 257 35101
M8	M	8	6	85	29 400	9800	2422 257 35102

1) When ordering, the last but one digit should be 2 for bulk packing and 6 for single-unit packing.